

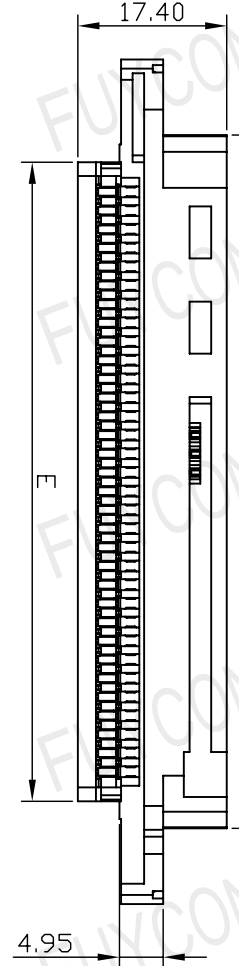



| REV | DATE | DESCRIPTION |
|-----|-----------|-------------|
| B | 2013-1-30 | 修改图形 |

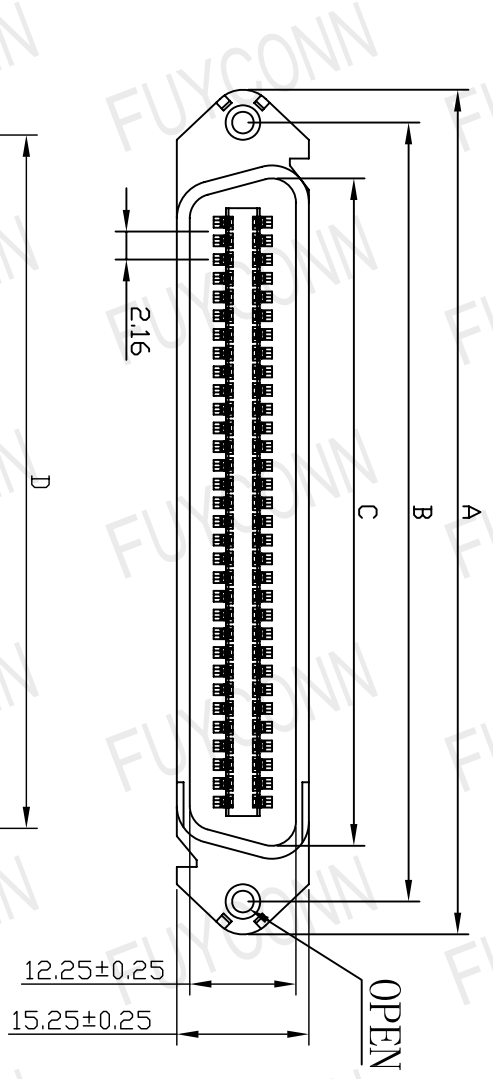

| Positions | A±0.25 | B±0.25 | C±0.25 | D±0.25 | E±0.25 |
|-----------|--------|--------|--------|--------|--------|
| 50P | 82.40 | 74.90 | 64.80 | 67.55 | 58.10 |
| 64P | 97.52 | 89.95 | 79.80 | 82.67 | 73.80 |

主体

Phosphor bronze or brass
 Gold Plated
 INSULATOR:
 PP0 & Glass-fibre reinforced
 UL-94-V0
 CURRENT RATING: 5Amp
 DIELECTRIC STRENGTH:
 1000V for one minute
 INSULATOR RESISTANCE:
 1000MΩ MIN.(at 500V DC)
 CONTACT PESTANCE: 25mΩ Max. mated
 TEMPERATURE:
 -55°C to +105°C

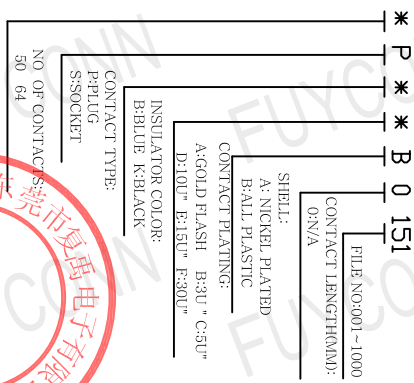

UNIT : mm



FUYCONN
 东莞市复禹电子有限公司
 DONG GUAN FUYCONN ELECTRONICS CO., LTD

MODEL NAME:
57-刺破式公头

| SELECT | 1 | 2 | 3 | EXTRA |
|--------|------|------|------|-------|
| MINI | 0.05 | 0.05 | 0.10 | |
| ANGLE | 0.10 | 0.15 | 0.20 | |
| | 0.15 | 0.25 | 0.30 | |
| | 0.25 | 0.30 | 0.40 | |
| | 3.0° | 5.0° | | |

PART NO. 57R1*P**B0151
 APPROVED BY:
 CHECKED BY:
 DRAW BY: 韦锋
 FILE NO. FUY57151-1
 SCALE:
 DATE: 2013-1-30